



## C-41 Film Chemicals: For minilabs

### Rapid Process MYDONEG SP 100 DEVELOPER/REPLENISHER

is a single part, high stability developer concentrate designed for standard and rapid process systems with low utilisation. With a replenishment rate of  $50 \pm$  mls/roll 135-24 (100 ASA) this product can be used as a drop in replacement for similar chemical systems. The advantages of using Mydoneg SP100 Developer/Replenisher is clear, less down time, clean working and improved stability.

#### N1 Mydoneg SP 100 Developer/Replenisher:

- For processing low volumes of color negative film in all color film processors
- Stable with low to medium workload conditions
- Compatible with similar chemical systems
- Replenishment rate of 50mls/roll of 135/24

#### N2 Mydoneg AIR RA Bleach Replenisher:

- This rapid process bleach is designed for minilabs with a 50 second or longer bleach time
- Replenishment rate of 5mls/roll of 135/24
- It has no acetic acid (no vinegar smell)

#### N3 Mydoneg RA Fixer Replenisher:

- Designed for a Rapid Access (RA) environment
- Companion product to Mydoneg AIR RA Bleach Replenisher
- Easy to mix concentrate comes in a convenient 2L size for C41RA application

#### N4 Mydoneg Plus Stabilizer Replenisher:

- Works well with many systems of C-41 chemistry in a wide variety of minilab applications


<b>N1</b>	Mydoneg SP 100 Developer/Replenisher	4x5L	140116
<b>N2</b>	Mydoneg Universal AIR Bleach Replenisher	4x2L	140335
<b>N3</b>	Mydoneg RA Fixer Replenisher	2x10L	140208
<b>N4</b>	Mydoneg Plus Stabilizer Replenisher	2x200L	140625
<b>N1-S</b>	C41 Universal Film Developer Starter	Variable	140302



\* Mix Well


**Replenisher Solutions**

**N1 – Mydoneg SP 100 Developer/Replenisher**




**N2 – Mydoneg Universal Air Bleach/Replenisher**


Ready-to-use.  
Do not dilute.



**N3 – Mydoneg RA Fixer Replenisher (C41-RA)**




**N4 – Mydoneg Plus Stabilizer Replenisher**




**Working solutions**

**N1 – Mydoneg SP 100 Developer/Repl.**

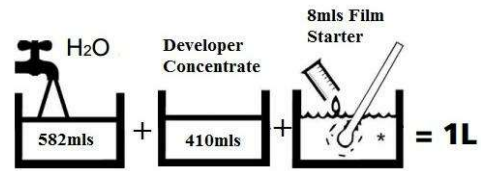

**N2 – Mydoneg Universal Air Bleach/Repl**

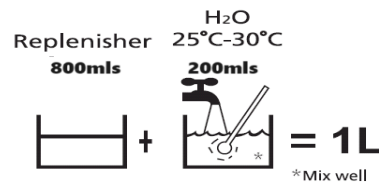

For N3, Mydoneg RA Fixer Replenisher and N4, Mydoneg Plus Stabilizer Replenisher, preparation of the working solution is same as the Replenisher

**PROCESS SPECIFICATIONS**

\*recommended starting point

Step	Processing Stage	Processing Time (Sec)	Recommended Temperature °C	Replenisher Rate (ml/roll 135-24)	Preparation of Working Solution (1L)
N1	Mydoneg SP 100 Developer/Replenisher	195	38.0 ± 0.3	50	(1)582ml Water (2)410ml Developer Conc (3)8ml Starter
N2	Mydoneg Universal Air RA Bleach Repl	50	38.0 ± 3.0	5	(1) 800mls Replenisher (2) 200mls Water
N3	Mydoneg RA Fixer Repl. (C41-RA)	90	38.0 ± 3.0	33	Same as Replenisher
N4	Mydoneg Plus Stabilizer Repl.	60	38.0 ± 3.0	33	Same as Replenisher

**CHEMISTRY SPECIFICATIONS**

	<b>N1 Mydoneg SP 100 Dev &amp; Repl</b>		<b>N2 Mydoneg AIR RA Bleach Repl</b>		<b>N3 Mydoneg RA Fixer Repl (C41-RA)</b>		<b>N4 Mydoneg Plus Stabilizer Repl</b>	
	Seasoned Tank	Repl Tank	Seasoned Tank	Repl Tank	Seasoned Tank	Repl Tank	Seasoned Tank	Repl Tank
pH	10.30 ± 0.10	10.40± 0.05	4.50± 0.20	3.75± 0.05	7.25± 0.20	7.47± 0.20	7.50± 0.20	7.40± 0.20
Sp Gr	1.034 ± 0.010	1.037± 0.010	1.132± 0.020	1.149± 0.006	1.109± 0.010	1.099± 0.010	1.005± 0.005	1.005± 0.005

**STORAGE OF CHEMICALS:**

- **Concentrates** -All of the processing system concentrates have a normal storage life of at least 12 months, when held in unopened containers under steady temperature conditions 13°C- 18°C (56°F - 66°F). However, storage temperature below 5°C (41.5°F) should be avoided as some crystallization may occur.
- **Working Solutions and Replenishers** - Machine tank solutions should not be allowed to stand unused for more than one week, or the activity will be reduced by aerial oxidation. No more than one week's supply of any of the replenisher solutions should be made up at a time.
- **Safe Use of Processing Chemicals** -All chemicals should be kept out of reach of children. Refer to labels on the box and to the Material Safety Data Sheet for precautionary information. Protective clothing, including gloves and face/eye protection should always be worn when handling chemicals.

Contact our Service Plus Department or your local representative to determine which combination of chemicals is best suited for you

**WARRANTY:** Seller, Champion Photochemistry, expressly disclaims any and all warranties, express or implied, including any warranties of merchantability or fitness. Seller's sole obligation for defect is to replace the defective product. In no event shall seller have any liability for incidental or consequential damages.

Manufactured by:  
**CHAMPION PHOTOCHEMISTRY SDN. BHD.**  
 Lot 28-B Mukim Batu Industrial Area,  
 6½ Miles Jalan Kepong,  
 52000 Kuala Lumpur, Malaysia  
 Tel : (603)6257-2600 Fax : (603)6257-2622  
 Website : [www.championphotochemistry.com](http://www.championphotochemistry.com)